



## 1 Verify the material.


- Damper assembly
- Metal frame
- Screw bag
- Jumper
- Plastic bushing
- Screwdriver Phillips #2
- Small flat screw driver
- Metal scissor
- Knife

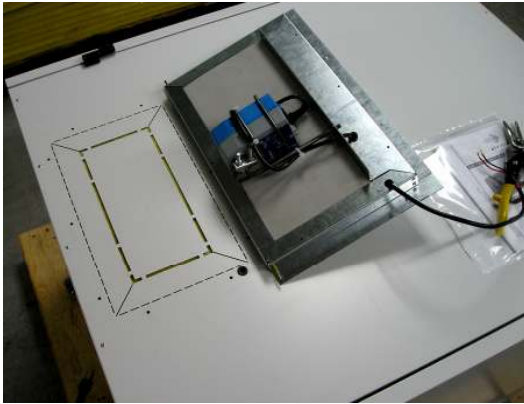


## 2 Cut the internal section on the top of the unit.

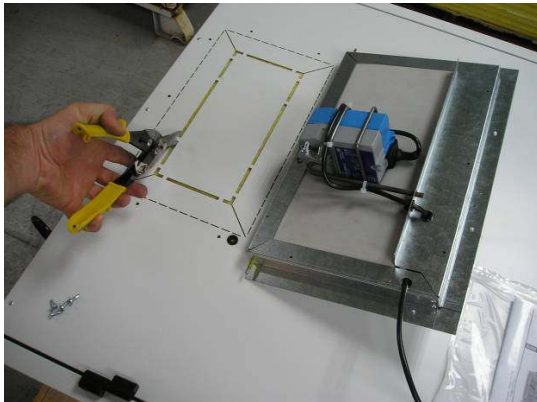


## 3 Fold the four side of the duct side.

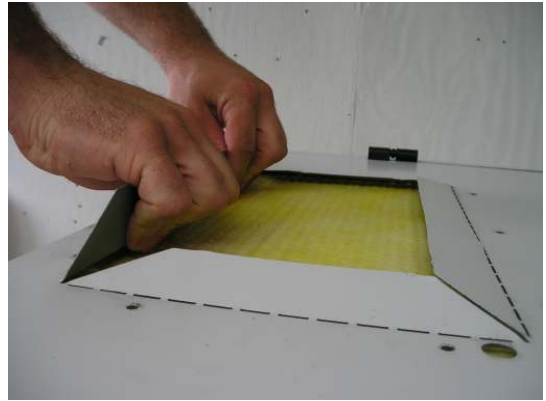

## 4 Cut the insulation along the duct side.

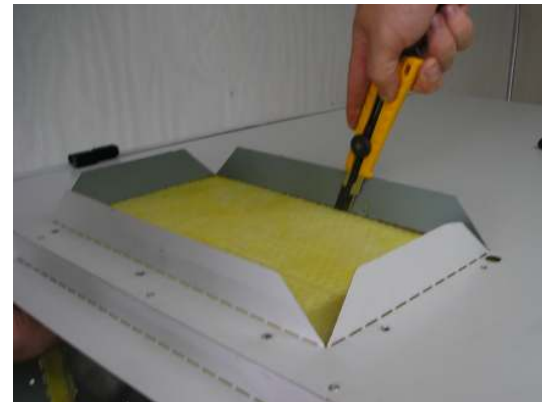

- 5 Cut the insulation accordingly to the dimensions below.

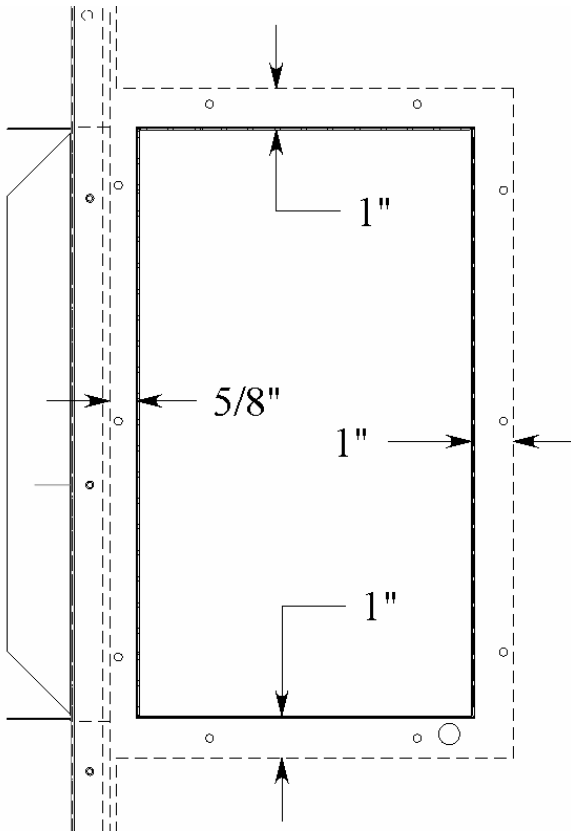

- 6 Pass the actuator wire in the hole.



- 7 Fix the damper with the supplied screw.



- 8 Install the plastic bushing.



9 Install the metal frame inside the unit.




10 Fix the metal frame with the supplied screw.



11 Wire the actuator to the 11 and 12 position on the terminal strip.



12 Install the jumper on the OPTION 1 position on the electronic board.

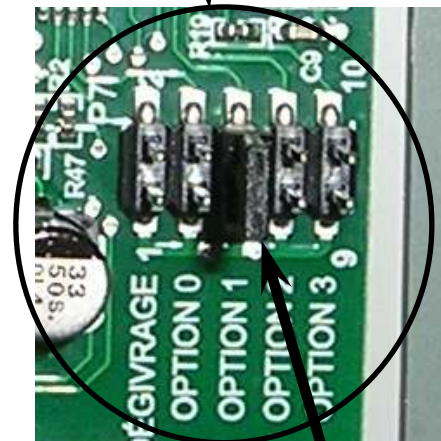

Jumper